QUOTATION **Please refer to our quotation number in the event of placing an order with us**				
	Quote No.:	**UK47402**	Date:	**15/06/2026**
	By:	**Danny Smart**	Rev:	**0**
	Enq Ref:	**RFQ 68057**		
	F. A. O.	**Paul Mitchell**		
	Customer:	**SMD**		









Welded and non-welded pipework systems

GS-Hydro UK Ltd
Unit 5 Daughters Court
Silkwood Park
Ossett WF5 9TQ

Telephone: +44 (0)1924 271980

www.gshydro.com

Specification

GS-Hydro have been requested to quote the production of the below stainless-steel spools.

- 1 Off – AR0706 FABRICATION PIPE 2" NB SUCTION SS (Rev.0)
- 1 Off – AR1404 FABRICATION PIPE 2" NB SUCTION SS (Rev.0)

To be fabricated to SMD specification SMDW002.

All prices are based on the **production of all spools strictly in accordance with the issued drawings**. Should site attendance be required, this will be charged at our standard schedule of rates, which is available upon request.

Each spool to be flushed to a minimum of 17/15/12 (NAS Class 6) and pressure tested to 1.5x working pressure (see individual drawings for each WP) using standard hydraulic mineral oil.

Each spool will be provided with a temporary tag stating the SMD Part No, issue level and purchase order number. The rim of both fittings will also be stamped or engraved with pipe part No.

All ports to be capped prior to shipping, any sealing faces to be protected for transportation.

Certification / Documentation to be Provided

- Flushing & Pressure Test Certification

Exclusions

- Painting

Safety and Standards

GS Hydro has been installing piping systems for years and complies with relevant safe working practices. Typically, we follow BFPA (British Fluid Power Association) recommendations. Copies of their relevant standards can be purchased from www.bfpa.co.uk

Terms and Conditions of Sale

Prices:	**AR0706**	**= £ 688.98 Each**
	AR1404	**= £ 800.01 Each**
	Total	**= £ 1,488.99**

Note: Above prices are valid for one complete order of all of the above only.

Value Added Tax:	Not included.
Time of Delivery:	Materials 1-2 weeks from order. Labour availability to be determined at time of order.
Terms of Payment:	30 days net monthly
Validity Time:	30 days
Conditions of Sale:	Our standard Terms & Conditions of sale apply, a copy of which can be supplied upon request.

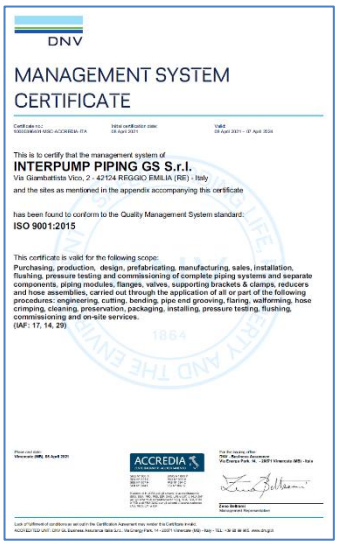
I hope that this proposal covers your requirements in enough detail for the moment.
Please call me directly if you have any other questions.

Danny Smart

Project Sales & Operations Manager
GS-Hydro UK Ltd

Approvals & Certification

QUALITY ASSURANCE ISO 9001 : 2015


DNV

MANAGEMENT SYSTEM CERTIFICATE

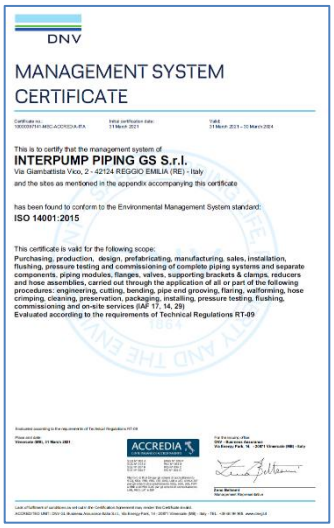
This is to certify that the management system of
INTERPUMP PIPING GS S.r.l.
Via Giambattista Vico, 2 - 42124 REGGIO EMILIA (RE) - Italy
and the sites as mentioned in the appendix accompanying this certificate

has been found to conform to the Quality Management System standard:
ISO 9001:2015

This certificate is valid for the following scope:
Purchasing, production, design, prefabricating, manufacturing, sales, installation, flushing, pressure testing and commissioning of complete piping systems and separate components, piping modules, flanges, valves, supporting brackets & clamps, reducers and hose assemblies, carried out through the application of all or part of the following procedures: engineering, cutting, bending, pipe end grooving, flaring, wallforming, hose crimping, cleaning, preservation, packaging, installing, pressure testing, flushing, commissioning and on-site services.
(IAF: 17, 14, 29)

ACCREDIA

HEALTH AND SAFETY POLICY OHSAS 45001:2018


DNV

MANAGEMENT SYSTEM CERTIFICATE

This is to certify that the management system of
INTERPUMP PIPING GS S.r.l.
Via Giambattista Vico, 2 - 42124 REGGIO EMILIA (RE) - Italy
and the sites as mentioned in the appendix accompanying this certificate

has been found to conform to the Environmental Management System standard:
ISO 14001:2015

This certificate is valid for the following scope:
Purchasing, production, design, prefabricating, manufacturing, sales, installation, flushing, pressure testing and commissioning of complete piping systems and separate components, piping modules, flanges, valves, supporting brackets & clamps, reducers and hose assemblies, carried out through the application of all or part of the following procedures: engineering, cutting, bending, pipe end grooving, flaring, wallforming, hose crimping, cleaning, preservation, packaging, installing, pressure testing, flushing, commissioning and on-site services (IAF 17, 14, 29)
Evaluated according to the requirements of Technical Regulations RT-09

ACCREDIA

ENVIRONMENTAL POLICY ISO 14001: 2015


DNV·GL

MANAGEMENT SYSTEM CERTIFICATE

Si certifica che il sistema di gestione dell'This is to certify that the management system of
I.M.M. Hydraulics S.p.A.
Sede Legale: Via Italia , 49/51 - 66041 Atessa (CH) - Italy
e i siti come elencati nell'Appendix che accompagna questo certificato
and the sites as mentioned in the appendix accompanying this certificate

È conforme ai requisiti della norma per il Sistema di Gestione Ambientale/
Has been found to conform to the Environmental Management System standard:
ISO 14001:2015

Valutato secondo le prescrizioni del Regolamento Tecnico RT-09/
Evaluated according to the requirements of Technical Regulations RT-09

Questa certificazione è valida
per il seguente campo applicativo:
Progettazione, produzione e commercializzazione di tubi idraulici realizzati mediante le fasi di saldocurvatura, tr.ecsaltura e/o spiralatura, vulcanizzazione, rullatura ed imballaggio; Progettazione, produzione e commercializzazione di raccordi e/o oleodinamica realizzati mediante le fasi di tornitura, trattamento termico, assemblaggio ed imballaggio. Produzione e commercializzazione di tubi idraulici raccordati Assemblaggio e commercializzazione di presse idrauliche. Acquisto, progettazione, produzione e montaggio di sistemi rigidi di connessione idraulici, moduli idraulici, flange, valvole e riduttori realizzati mediante le operazioni di taglio, curvatura, scanalatura, svasatura e imballaggio
(EA 14, 17, 18)

This certificate is valid
for the following scope:
Design, production and sale of hydraulic hoses carried out through the following steps: extrusion, braiding and/or spiraling, vulcanization, feed and packaging. Design, production and sale of hydraulic fittings carried out through the following steps: turning, heat treatment bending, assembly and packaging. Production and sale of assembled hoses. Assembly and sale of hydraulic presses. Purchasing, design, production, pre-fabricating, manufacturing and assembly of piping systems, piping modules, flanges, valves and reducers, carried out through the following steps: Cutting, bending, pipe end grooving, flaring, cleaning and packaging.
(EA 14, 17, 18)

Luogo e data/Place and date:
Vimercate (MB), 11 ottobre 2018

ACCREDIA